
ASHE CONTROLS PVT LTD
an ISO 9001:2015 certified company

SPX-61U

SPX-Series Static Power Switching Unit (Automatic Transfer Switch)

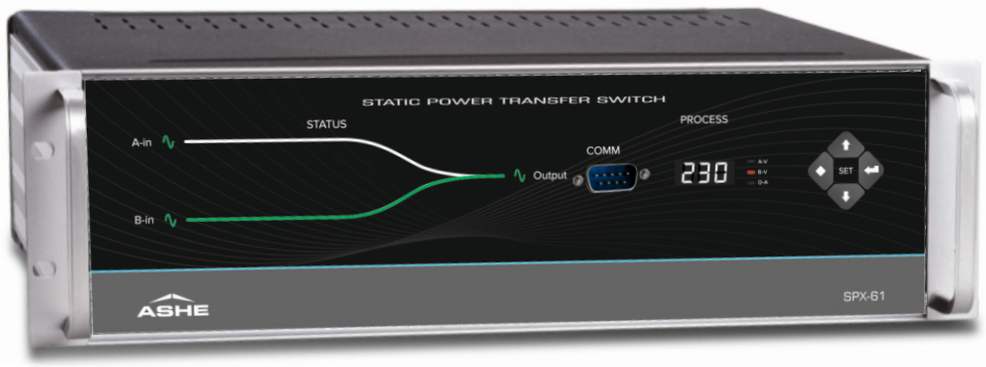

Overview

The Ashe Series SPX-61 Static Power Transfer Switches are a range of microcontroller based thyristorized AC power switching units. The instrument is used as a watchdog for the AC mains power line in industries. It accepts two single phase power feeders as input lines. Depending upon the preset selections for load voltage and current limits, the SPX-61 seamlessly switches one of the two input sources to the output.

The Static Power SPX-61 Switch provides a selection of one primary feeder out of two input power feeders. Further, it monitors the voltage and current continuously and sequentially displays these values on the front panel digital display. The instrument has a membrane touchpad on the front panel through which one may set all the parameters. An active LED mimic indicates the status of the input and output signals.

The Ashe SPX-61 Power Switching unit has intelligent Auto-Recovery facility – hence when power is restored, the instrument automatically returns to the primary power feeder. It is offered in slim and aesthetically designed enclosures of 3U/19" Rack mount execution and consumes minimal panel space.

The design uses state of the art techniques in high speed bump-less power switching, providing excellent voltage monitoring, high efficiency and low power dissipation. It is offered in a wide range of ultra power ratings. The SPX-61 unit is designed for continuous full load operation in tough industrial environments, while ensuring the protection of the powered equipment.

The instrument offers RS485 on Modbus RTU input / output status and real-time system values to a centralized control or monitoring system, additionally an integrated relay provides a clear status indication of switching events between primary and secondary power sources.

This product is backed by a full two-year warranty, covering all manufacturing defects and workmanship issues under normal operating conditions.

Specifications

Model	ASHE SPX-61U
Type	Microcontroller-based Thyristorized Static Power Switching unit for seamless AC Voltage switching, with digital indication and data communication.
Inputs	Two nos. AC Voltage inputs.
Output	One AC Voltage output (depending on input status).
Voltage Channel A	110 OR 230 VAC, Single phase 50/60 Hz (to be Pre-specified).
Voltage Channel B	110 OR 230 VAC, Single phase 50/60 Hz (to be Pre-specified).
Switching Poles	Single/Double pole (to be Pre-specified).
Neutral	Common in Single pole / Isolated in Double pole.
Priority	Precedence to Channel A. If channel A fails, power source will be seamlessly switched to Channel B. When Channel A is restored, power source will be switched back to Channel A.
Current Switching	Up to 61 Ampere.
Selection Options	Primary Source selection, Range for Voltage watch-dog, Range for Current watch-dog, etc.
Switching Time	<12 mSec.
Alarm Output	Relay changeover contacts on switch-over.
Indications	a) 3-digit seven-segment LED display for Input indications and menu selections. b) Active LED Mimic for status indications of Input sources and Output condition.
Settings	By four-key Membrane touchpad on front panel.
Switching Devices	Solid State Relays
Execution	19" Rack Mounting 3U
Dimensions	133.5 x 483 x 300 mm [H x W x D]
Weight	Approx 4 kg.
Operating Temperature	0 to 55^{0}C.

Features


- Single pole or double pole (optional)
- Microcontroller based Thyristorized design
- Load Rating of up to 61 Ampere
- Ultra High-speed switching for seamless power transfer (<12 mSec.)
- Watchdog for power feeders
- Automatic recovery after power restoration
- Various AC Power Inputs (Pre-specified)
- Configurable load current and Input voltage limits
- RS485 on Modbus RTU data communication
- Very low power consumption and heat dissipation by forced cooling
- RFI and EMI filters provided
- Digital metering for both Input Voltages and bad current
- Control Relay output for power fail alarm
- High Noise immunity
- Aesthetically designed slim execution
- Two-year Performance Warranty
- Proven track record of successful site installations

www.ashecontrols.com • Phone : (022) 2405 1561, 2405 5791, 2405 5543 • E-mail : sales@ashecontrols.com


SPX-61U

SPX-Series Static Power Switching Unit (Automatic Transfer Switch)


Dimensional Diagram

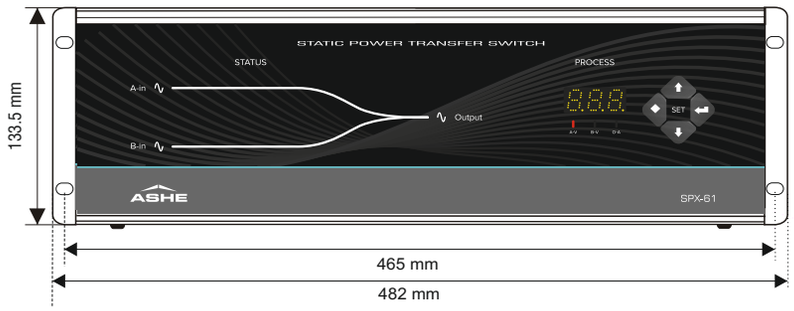

FRONT VIEW

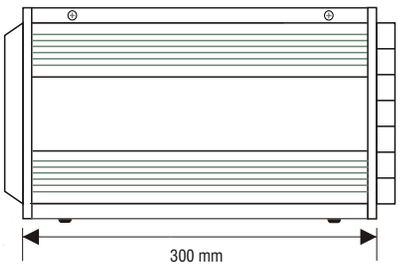

SIDE VIEW

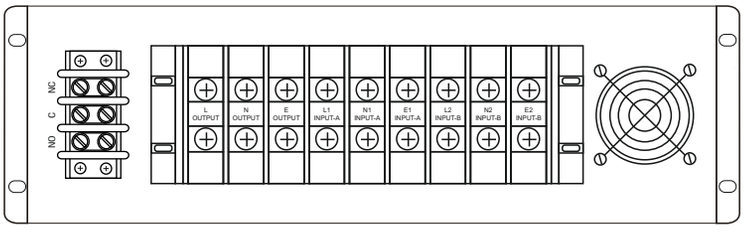

REAR VIEW

How To Order

	STATIC POWER SWITCHING UNIT (Automatic Transfer Switch)	**SPX**							
	Configuration and add-on options								
1	**LOAD CURRENT**								
▸	61 Ampere		61						
2	**EXECUTION**								
▸	19" Rack Mounting - 1U, 2U & 3U			U					
▸	Din Rail (upto 31 Ampere)			D					
3	**INPUT VOLTAGES**								
▸	110 VAC 50/60 Hz				H				
▸	230 VAC 50/60 Hz				A				
4	**SWITCHING POLE**								
▸	Single (only for Din Rail Mount)					S			
▸	Dual (only for Rack Mount)					D			
5	**TERMINATION**								
▸	Screw Terminal (upto 101 Ampere)						S		
▸	Power Socket (upto 31 Ampere only)						p		
6	**COMMUNICATION**								
▸	RS485 on Modbus RTU required							M	
▸	RS485 on Modbud RTU Not required							N	

Our Other Products



FLOW TOTALIZER



SIGNAL ISOLATORS & TRANSDUCERS



TEMPERATURE SCANNER



FLAMEPROOF INSTRUMENTS



STATIC POWER SWITCHES

Designed and Manufactured by :

ASHE CONTROLS PRIVATE LIMITED

6/317, 318 & 319, Jogani Industrial Complex, Near ATI, Sion-Trombay Road, Chunabhatti (East), Mumbai - 400 022, India.

Phone : (022) 2405 1561, 2405 5791, 2405 5543 • E-mail : sales@ashecontrols.com • Website: http://www.ashecontrols.com